

T3A90L-2 2,2KW 230/400V B3


Three-phase asynchronous motor in aluminum

Motor type T3A90L-2 2,2KW 230/400V B3
 Brand BUSCK
 Item number 93020911

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	2,2	50	7,83	2910
400	2,2	50	4,5	2910
460	2,53	60	4,5	3492

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	85,9
Insulation class	F	Efficiency, load 75%	86,1
Cooling	IC411 (TEFC)	Efficiency, load 50%	84,7
Max. ambient temp.	40°C	Power fact, load 100%	0,82
Min. ambient temp.	-20°C	Painting	Standard
Max. temp. rise	80 K	Color	RAL 9005
Max altitude, masl	1000	Weight kg	16,3
Torque, Nm	7,22	Sound pressure Lp dB(A)	72
Starting torque ratio	3,1	Bearing DE	6205-2Z/C3
Pull up torque ratio	2,2	Bearing NDE	6205-2Z/C3
Pull out torque ratio	3,5	Balance grade	Normal
Starting current ratio	8,1	Inertia kgm ²	0,0026359
Winding protection	Thermocontacts	Cable entries	1xM20

Note IE3, Termokontakter

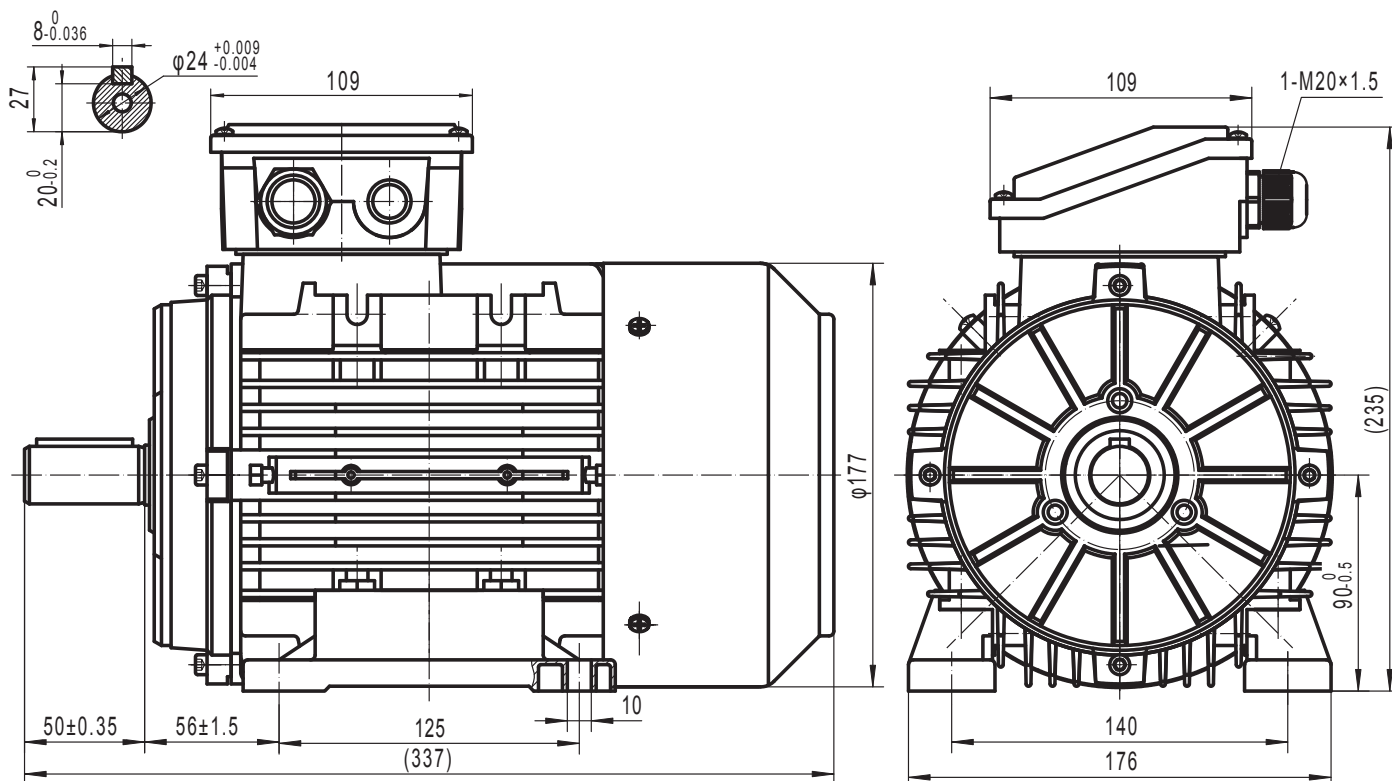

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no