




MOTOR DATA SHEET DS_SPM_09/23

GENERAL CHARACTERISTICS

Frame size	80
Type of construction	B14
Weight [kg]	16.5
Moment of Inertia [kgm ²]	0.0026
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15 / +40
Dielectric Strength Test IEC34-1	2kV 1s

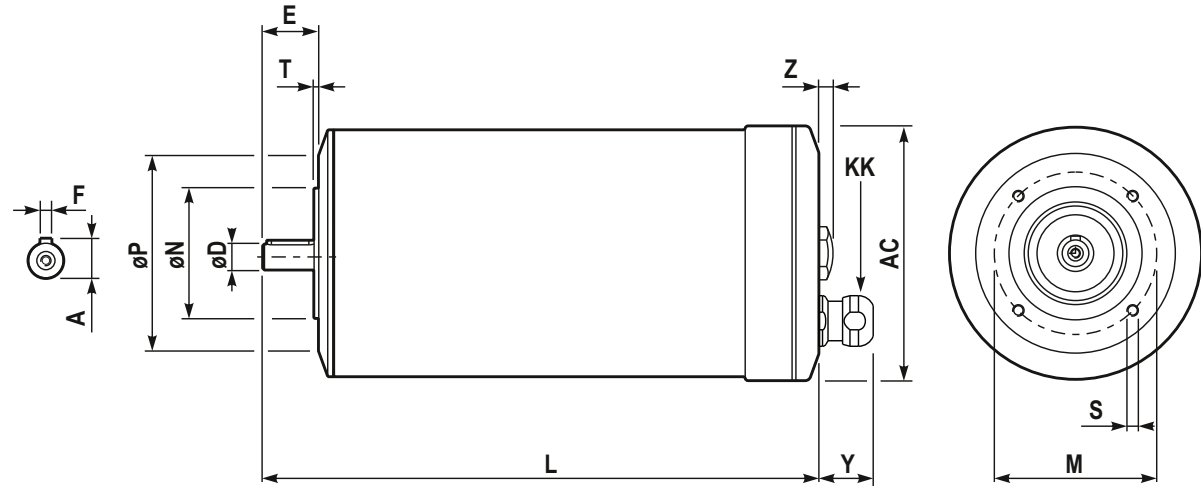

NAMEPLATE DATA and CONNECTION DIAGRAM

PREMIUM MOTOR S.S.316L

SPM 80A6 IMB14

Ins.Cl.F Amb. max 40°C IC411 Duty S1 IP69K

DE 6205.2Z NDE 6205.2Z Weight 16.5 Kg

Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 264/460V


0.37 kW 2.1 / 1.2 A 0.5 HP 1.8 / 1.1 A

890 min⁻¹ cosφ 0.63 1125 min⁻¹ PF. 60 %

EFF(100%) 76.3 % NEMA DES.- CODE K

INVERTER DUTY

PWM SPEED RANGE 2.5:1: CT / 10:1 VT

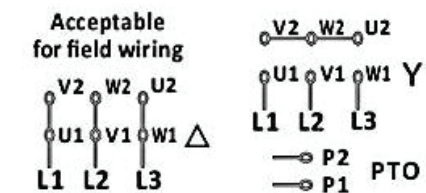

**INVERTER DUTY
 WASHDOWN
 HYGIENIC
 S.S. 316L
 IP69K**

DIMENSIONS

AC	Ø143	M	Ø100
Y	22.5	ØN	Ø80 j6
L	340	ØP	Ø120
ØD	19 j6 M6	T	3
E	40	n x S	4 M6x13
F	6	Z	7.4
A	21.5	KK ⁽¹⁾	M20 x 1.5 cable gland clamping range Ø9-12 mm

BEARINGS

DE	6205.2Z
NDE	6205.2Z

(1) Hygienic cablegland, EHEDG certified
 Stainless steel, IP69K

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	