

Motor Designation
APM 0.37 kW 2p 71A
APMCKF2JTEN



MOTOR DATA SHEET DS-APM-/04/24


GENERAL CHARACTERISTICS

Frame size	71
Type of construction	B14
Weight [kg]	10.5
Moment of Inertia [kgm ²]	0.0008
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15/+40
Dielectric Strength Test	2kV 1s

NAMEPLATE DATA and CONNECTION DIAGRAM

ALUMINUM PREMIUM MOTOR APM 71 B14

Ins.Cl.F Amb. max 40°C IC411 Duty S1
 DE 6203.2Z NDE 6203.2Z Weight 10.5 Kg
 Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 277/480V
 0.37 kW 1.6 / 0.9 A 0.5 HP 1.6 / 0.9 A
 2930 min⁻¹ cosφ 0.75 3545 min⁻¹ PF. 72%
 EFF(100%) 82.5 % NEMA DES.- CODE K
 INVERTER DUTY
 PWM SPEED RANGE 2.5:1: CT / 10:1 VT

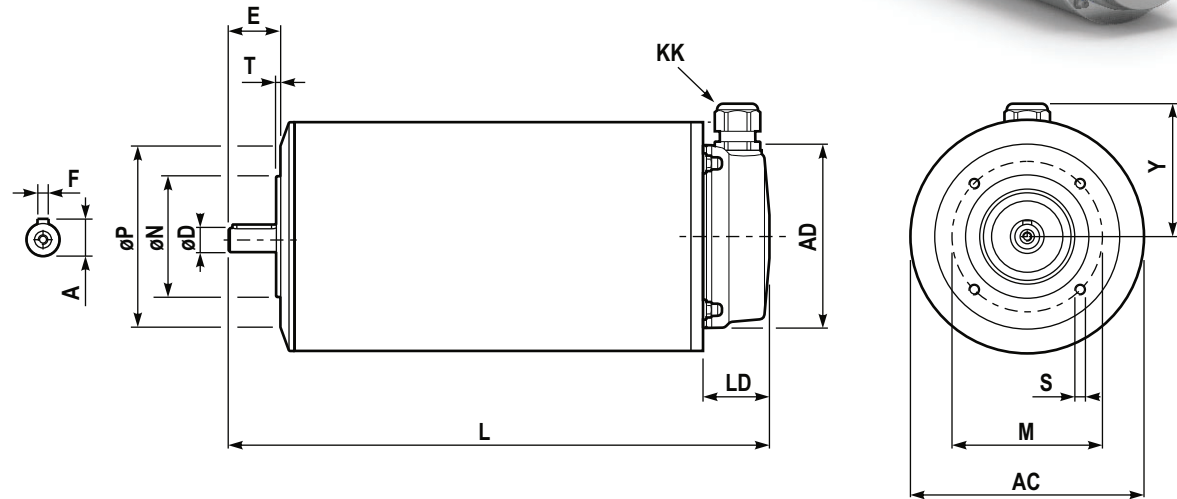

DIMENSIONS

AC	Ø133	LD	38.5
AD	Ø106	M	85
Y	78	ØN _{j6}	Ø70
L	311	ØP	Ø105
ØD _{j6}	Ø14	T	2.5
E	30	n x S	M6x15
F	5	KK ⁽¹⁾	M20x1.5
A	16		

BEARINGS

DE	6203.2Z
NDE	6203.2Z

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	
-	