


T2A71C-4 0,55KW 230/400V B14

Three-phase asynchronous motor in aluminum

Motor type T2A71C-4 0,55KW 230/400V B14
 Brand BUSCK
 Item number P3040713e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,55	50	2,45	1395
400	0,55	50	1,41	1395
460	0,63	60	1,41	1674

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	77,1
Insulation class	F	Efficiency, load 75%	77,1
Cooling	IC411 (TEFC)	Efficiency, load 50%	75,5
Max. ambient temp.	40°C	Power fact, load 100%	0,73
Min. ambient temp.	-20°C	Painting	Standard
Max. temp. rise	80 K	Color	RAL 9005
Max altitude, masl	1000	Weight kg	7,5
Torque, Nm	3,77	Sound pressure Lp dB(A)	57
Starting torque ratio	2,5	Bearing DE	6204-2Z/C3
Pull up torque ratio	2,3	Bearing NDE	6204-2Z/C3
Pull out torque ratio	2,6	Balance grade	Normal
Starting current ratio	4,9	Inertia kgm ²	0,001089133
		Cable entries	1xM20

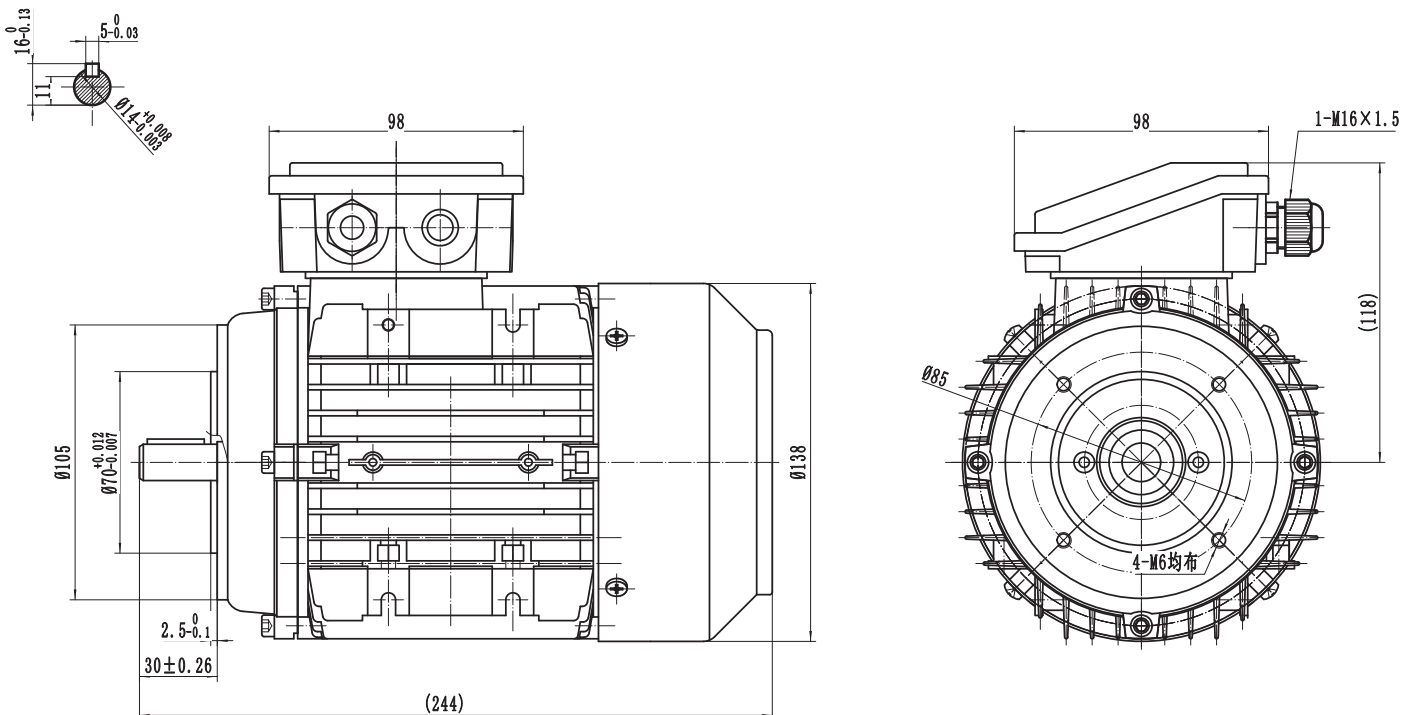

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no