

MOTOR DATA SHEET DS_SPM_05/24

GENERAL CHARACTERISTICS

Frame size	63
Type of construction	B34
Weight [kg]	7.6
Moment of Inertia [kgm ²]	0.0005
Degree of protection	IP69K
Direction of rotation	Both
Method of cooling	IC410
Duty	S1
Insulation class	F
Ambient temperature [°C]	-15 / +40
Dielectric Strength Test	2kV 1s

NAMEPLATE DATA and CONNECTION DIAGRAM

PREMIUM MOTOR S.S.316L

SPM SPM63A2 IMB34

Ins.Cl.F Amb. max 40°C IC411 Duty S1 IP69K

DE 6203.2Z NDE 6203.2Z Weight 7.6 Kg

Hz 50 Δ/Y 230/400V Hz 60 Δ/Y 264/460V

0.18 kW 0.9 / 0.5 A 0.25 HP 0.7 / 0.4 A



2890 min⁻¹ cosφ0.81 3461 min⁻¹ PF. 78 %

EFF(100%) 74.3 % NEMA DES.- CODE K

INVERTER DUTY

PWM SPEED RANGE 2.5:1: CT / 10:1 VT

Acceptable for field wiring

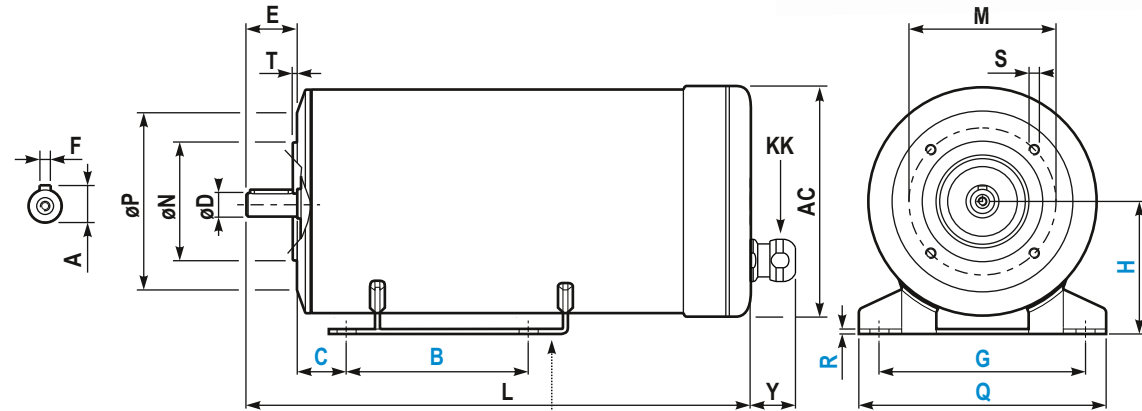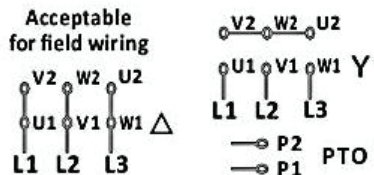


DIMENSIONS (mm)

AC	Ø133	M	Ø 75
Y	27.5	ØN	Ø 60
L	247.5	ØP	Ø 90
ØD	11 j6 M4	T	2.5
E	23	n x S	4 M5 x 13
F	4	KK ⁽¹⁾	M20x1.5
A	12.5		

FOOT DIMENSIONS (mm)

B	90
B1	-
C	45
G	112
H	71
U	7x10
Q	132
R	3



(1) Hygienic cableglend, EHEDG certified
 Stainless steel, IP69K

SPECIAL EXECUTION AND ACCESSORIES

	code
-	
-	
-	
-	

BEARINGS

DE	6203.2Z
NDE	6203.2Z