

T2A71A-2 0,37KW 230/400V B14 ATEX ZON 2/22


Three-phase asynchronous motor in aluminum

Motor type T2A71A-2 0,37KW 230/400V B14 ATEX ZON 2/22
 Brand BUSCK
 Item number Q3020713e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,37	50	1,57	2840
400	0,37	50	0,90	2840
460	0,43	60	0,90	3408

Duty	S1	Efficiency class	IE2
Enclosure	IP65	Efficiency, load 100%	71,5
Insulation class	F	Efficiency, load 75%	70,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	65,8
Max. ambient temp.	40°C	Power fact, load 100%	0,83
Min. ambient temp.	-20°C	Painting	Standard
Max. temp. rise	80 K	Color	RAL 9005
Max altitude, masl	1000	Weight kg	4,9
Torque, Nm	1,24	Sound pressure Lp dB(A)	64
Starting torque ratio	2	Bearing DE	6204-2Z/C3
Pull up torque ratio	1,4	Bearing NDE	6204-2Z/C3
Pull out torque ratio	2,2	Balance grade	Normal
Starting current ratio	5,1	Inertia kgm ²	0,00035
Winding protection	Thermistors	Cable entries	1xM20

Note ATEX II 3 D Ex tc IIIC T125°C Dc ZONE 22
 ATEX II 3 G Ex nA IIC T4 Gc ZONE 2
 IP65, Termistorer

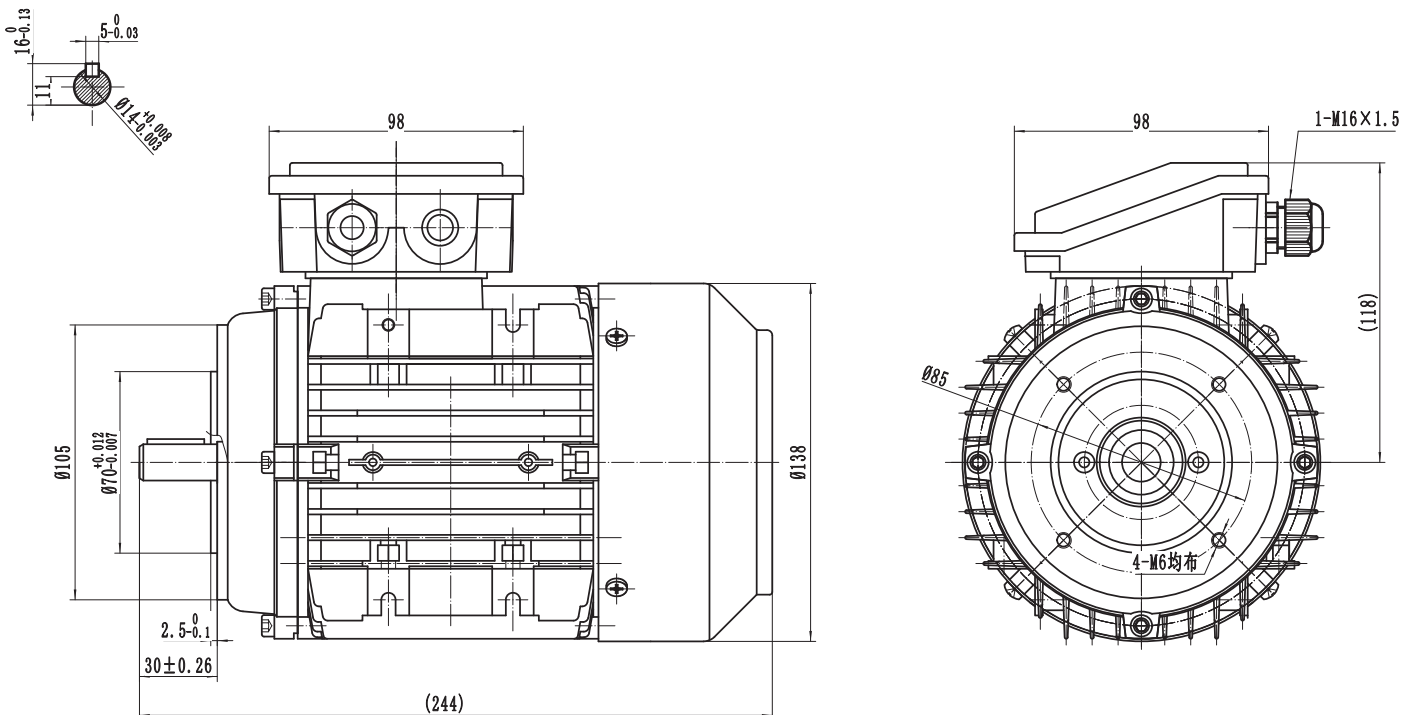

BUSCK
 www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
 info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
 info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
 info@busck.no